


RAC

●Features

1. High-density SMD packaging contributes higher productivity and reduces assembly costs.
2. Please contact KAMAYA for Halogen and Antimony free product of RAC series.
3. Stability Class : 5%

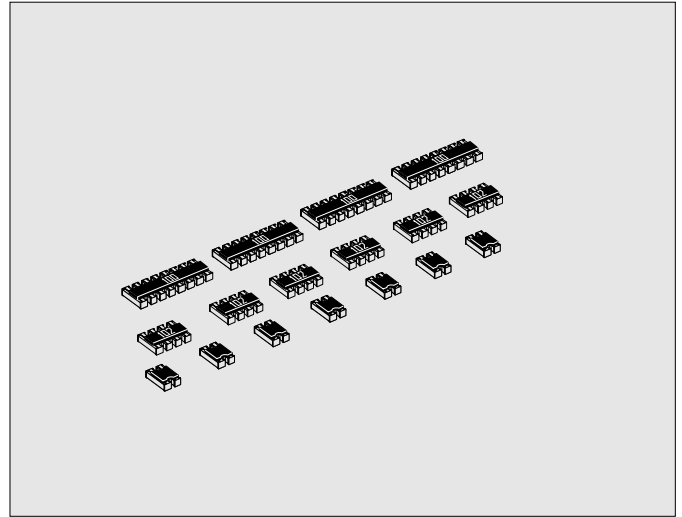

●Dimensions and Circuits

RAC102D

**RAC104D
RAC164D**

RAC168D

Circuits

$R_1=R_2=\dots=R_n$

• Please contact KAMAYA for different resistance values.

Note. Please contact KAMAYA for the detail of marking on the over coating.

Style	Terminal Style	L	W	H	Q ₁	*Q ₂	a	b	*P	*Unit weight/pc.
RAC102D	C	1.0±0.05	1.0±0.05	0.35±0.05	—	0.33	0.15±0.10	0.25 ^{+0.05} _{-0.10}	0.65	1.1mg
RAC104D	C	2.0±0.1	1.0±0.1	0.35±0.05	0.35±0.1	0.45	0.15±0.10	0.25±0.10	0.5	2.1mg
RAC164D	C	3.2±0.1	1.6±0.1	0.5 ±0.1	0.4 ±0.15	0.6	0.3 ±0.2	0.25±0.15	0.8	7mg
RAC168D	C	3.8±0.1	1.6±0.1	0.45±0.1	0.3 ±0.1	0.3	0.3 ±0.1	0.3 ±0.1	0.5	8.3mg

Unit : mm

*Values for reference

●Part Number Description

Example

Style	RAC	10	2	D	103	J	C	B
Product Type	Size	No. of Elements	Circuits	Rated Resistance	Tolerance on Rated Resistance	Terminal Style	* Packaging & Standard Qty. (Min.)	
	10 W:1.0mm 16 W:1.6mm	2 2-Elements 4 4-Elements 8 8-Elements	D Isolation	E24 Series e.g.:103=10k ohm JP Jumper	F ±1% J ±5% None	C Convex Type With corner	B Bulk (Loose Package)	1,000pcs. All Styles
				Resistor	Resistor		TH Paper Tape (2 mm pitch)	10,000pcs. RAC102D RAC104D
				Jumper	Jumper		TP Paper Tape	5,000pcs. RAC164D RAC168D

*Refer to Tape and Packaging information on pages 54 and 55.

FIXED CHIP RESISTOR NETWORKS; RECTANGULAR TYPE

RAC

●Ratings

Style	Rated Dissipation at 70°C		Rated Current of Jumper A	Rated Resistance Range	Tolerance on Rated Resistance	Temperature Coefficient of Resistance 10 ⁵ /°C	Limiting Element Voltage V	Preferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
	W/Element	W/pc.								
RAC102D	0.063	0.125	1.0	10Ω~1MΩ	J(±5%)	±200	25	E24	50	-55~+125
RAC104D		0.25			F(±1%)J(±5%)		50			
RAC164D					J(±5%)		25			
RAC168D										

Note1. Rated Voltage = √(Rated Dissipation)×(Rated Resistance). (d.c. or a.c. r.m.s. Voltage)


Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

●Derating Curve

The derated values of dissipation for temperatures in excess of 70°C shall be indicated by the following Curve.

(For Jumpers the load current shall be derated according to the Derating Curve)

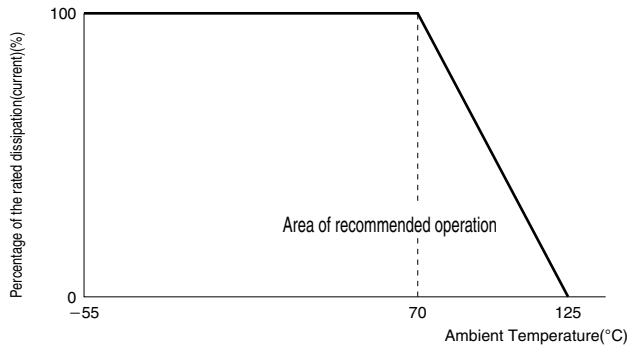

●Climatic Category

55/125/56

Lower Category Temperature -55°C
 Upper Category Temperature +125°C
 Duration of the Damp heat, Steady-State Test 56 days

●Performance Characteristics JIS C 5201-1 : 1998

Description	Requirements	Test Methods
Voltage proof	No breakdown or flashover R _≥ 1G ohm	Clause 4.7 RAC102D, 104D 50Va.c.,60s RAC164D, 168D 100Va.c.,60s
Variation of resistance with temperature	See Ratings Table	Clause 4.8 Measuring temperature : +20°C/-55°C/ +20°C/+125°C/+20°C
Overload	ΔR _≤ ±(1%+0.05 ohm) No visible damage, legible marking	Clause 4.13 The applied voltage shall be 2.5 times of the rated voltage or twice of the limiting element voltage, whichever is the less severe, 2s.
Solderability	In accordance with Clause 4.17.4.5	Clause 4.17 235°C, 2s
Resistance to soldering heat	ΔR _≤ ±(1%+0.05 ohm)	Clause 4.18 After immersion into the flux, the Immersion into solder shall be carried out in Solder bath at 260°C for 5s.
Rapid change of temperature	ΔR _≤ ±(1%+0.05 ohm) No visible damage	Clause 4.19 5 cycles between -55°C and +125°C.
Climatic sequence	ΔR _≤ ±(5%+0.1 ohm) No visible damage	Clause 4.23 Dry/Damp heat(12+12h cycle), first cycle./ Cold/Damp heat(12+12h cycle), remaining cycle./ D.C.Load.
Damp test, steady state	ΔR _≤ ±(5%+0.1 ohm) No visible damage, legible marking	Clause 4.24 40°C, 95%R.H., 56 days, test a) and b) of Clause 4.24.2.1
Endurance at 70°C	ΔR _≤ ±(5%+0.1 ohm) No visible damage	Clause 4.25.1 Rated voltage, 1.5h "ON", 0.5h "OFF", 70°C, 1,000h.
Endurance at the upper category temperature	ΔR _≤ ±(5%+0.1 ohm) No visible damage	Clause 4.25.3 125°C, no-load, 1,000h.
Adhesion	No visible damage	Clause 4.32 5N, 10s
Bend strength of the face plating	ΔR _≤ ±(1%+0.05 ohm)	Clause 4.33 Amount of bend : 3 mm